



Effect of Corrosion Inhibitors on Oil in Water Demulsification in Topsides Separators

Jørgensen, Mathias Kjeldahl; Montesantos, Nikolaos; Maschietti, Marco

Publication date:
2017

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Jørgensen, M. K., Montesantos, N., & Maschietti, M. (2017). *Effect of Corrosion Inhibitors on Oil in Water Demulsification in Topsides Separators*. Poster presented at Danish Hydrocarbon Research and Technology Conference, Kolding, Denmark.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

EFFECT OF CORROSION INHIBITORS ON OIL IN WATER DEMULSIFICATION IN TOPSIDE SEPARATORS

Mathias Kjeldahl Jørgensen, Nikolaos Montesantos, Marco Maschietti
Aalborg University Esbjerg, Department of Chemistry and Bioscience, Niels Bohrs Vej 8, 6700 Esbjerg, Denmark

Introduction

Corrosion inhibitors used in the Oil & Gas production end up in some extent in the topside separators, where they can result in stabilization of oil in water emulsion. The aim of the project is to study experimentally the separation kinetics of oil in water separation using different oil and brines, and how these interacts with corrosion inhibitors and demulsifiers.

Objectives


- Evaluate the effect of offshore O&G corrosion inhibitors on the oil-in-water separation.
- Evaluate if and to what extent increased concentrations of corrosion inhibitors in topside separators can be tolerated.
- Evaluate how the above-mentioned points are influenced by the type of crude oil, the type of brine and the demulsifiers used in topside separators.

Materials and method

1. Water with different ionic composition, see table 1.
2. Oil in water dispersion (IKA Ultra Turrax @ 10000 RPM)
3. Gravimetric separation with a settling time span of 5 minutes using 100 mL separation funnels under ambient temperature and 50°C.
4. Extraction with n-hexane by an OSPAR inspired method.
5. Quantification by GC-FID. External standard calibration with the same oil used for the experiments.




Oil/water ratio 0.2

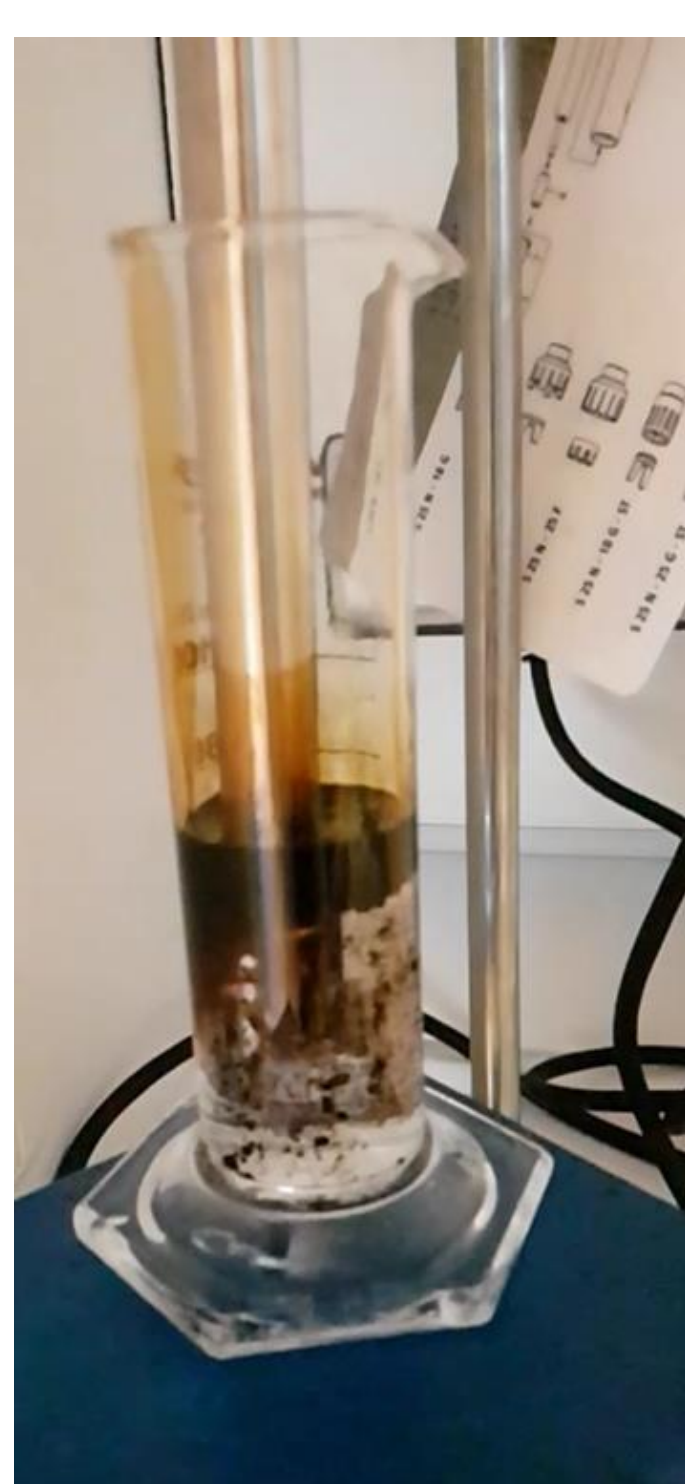


Dispersion



Settling

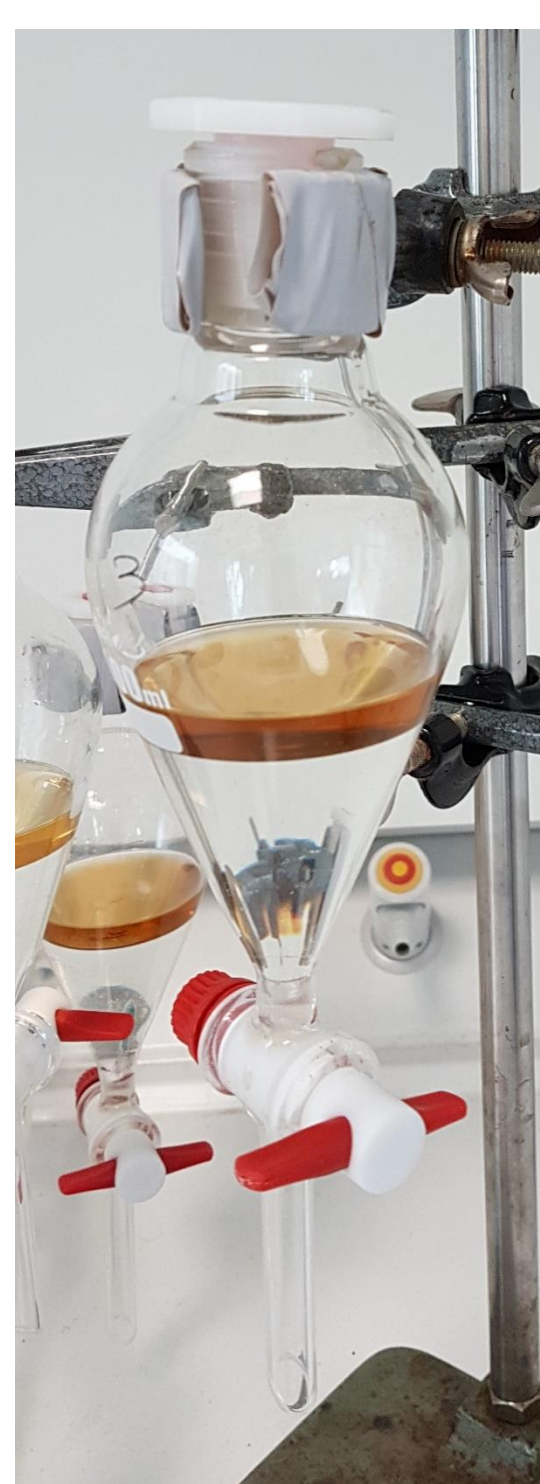

Extraction

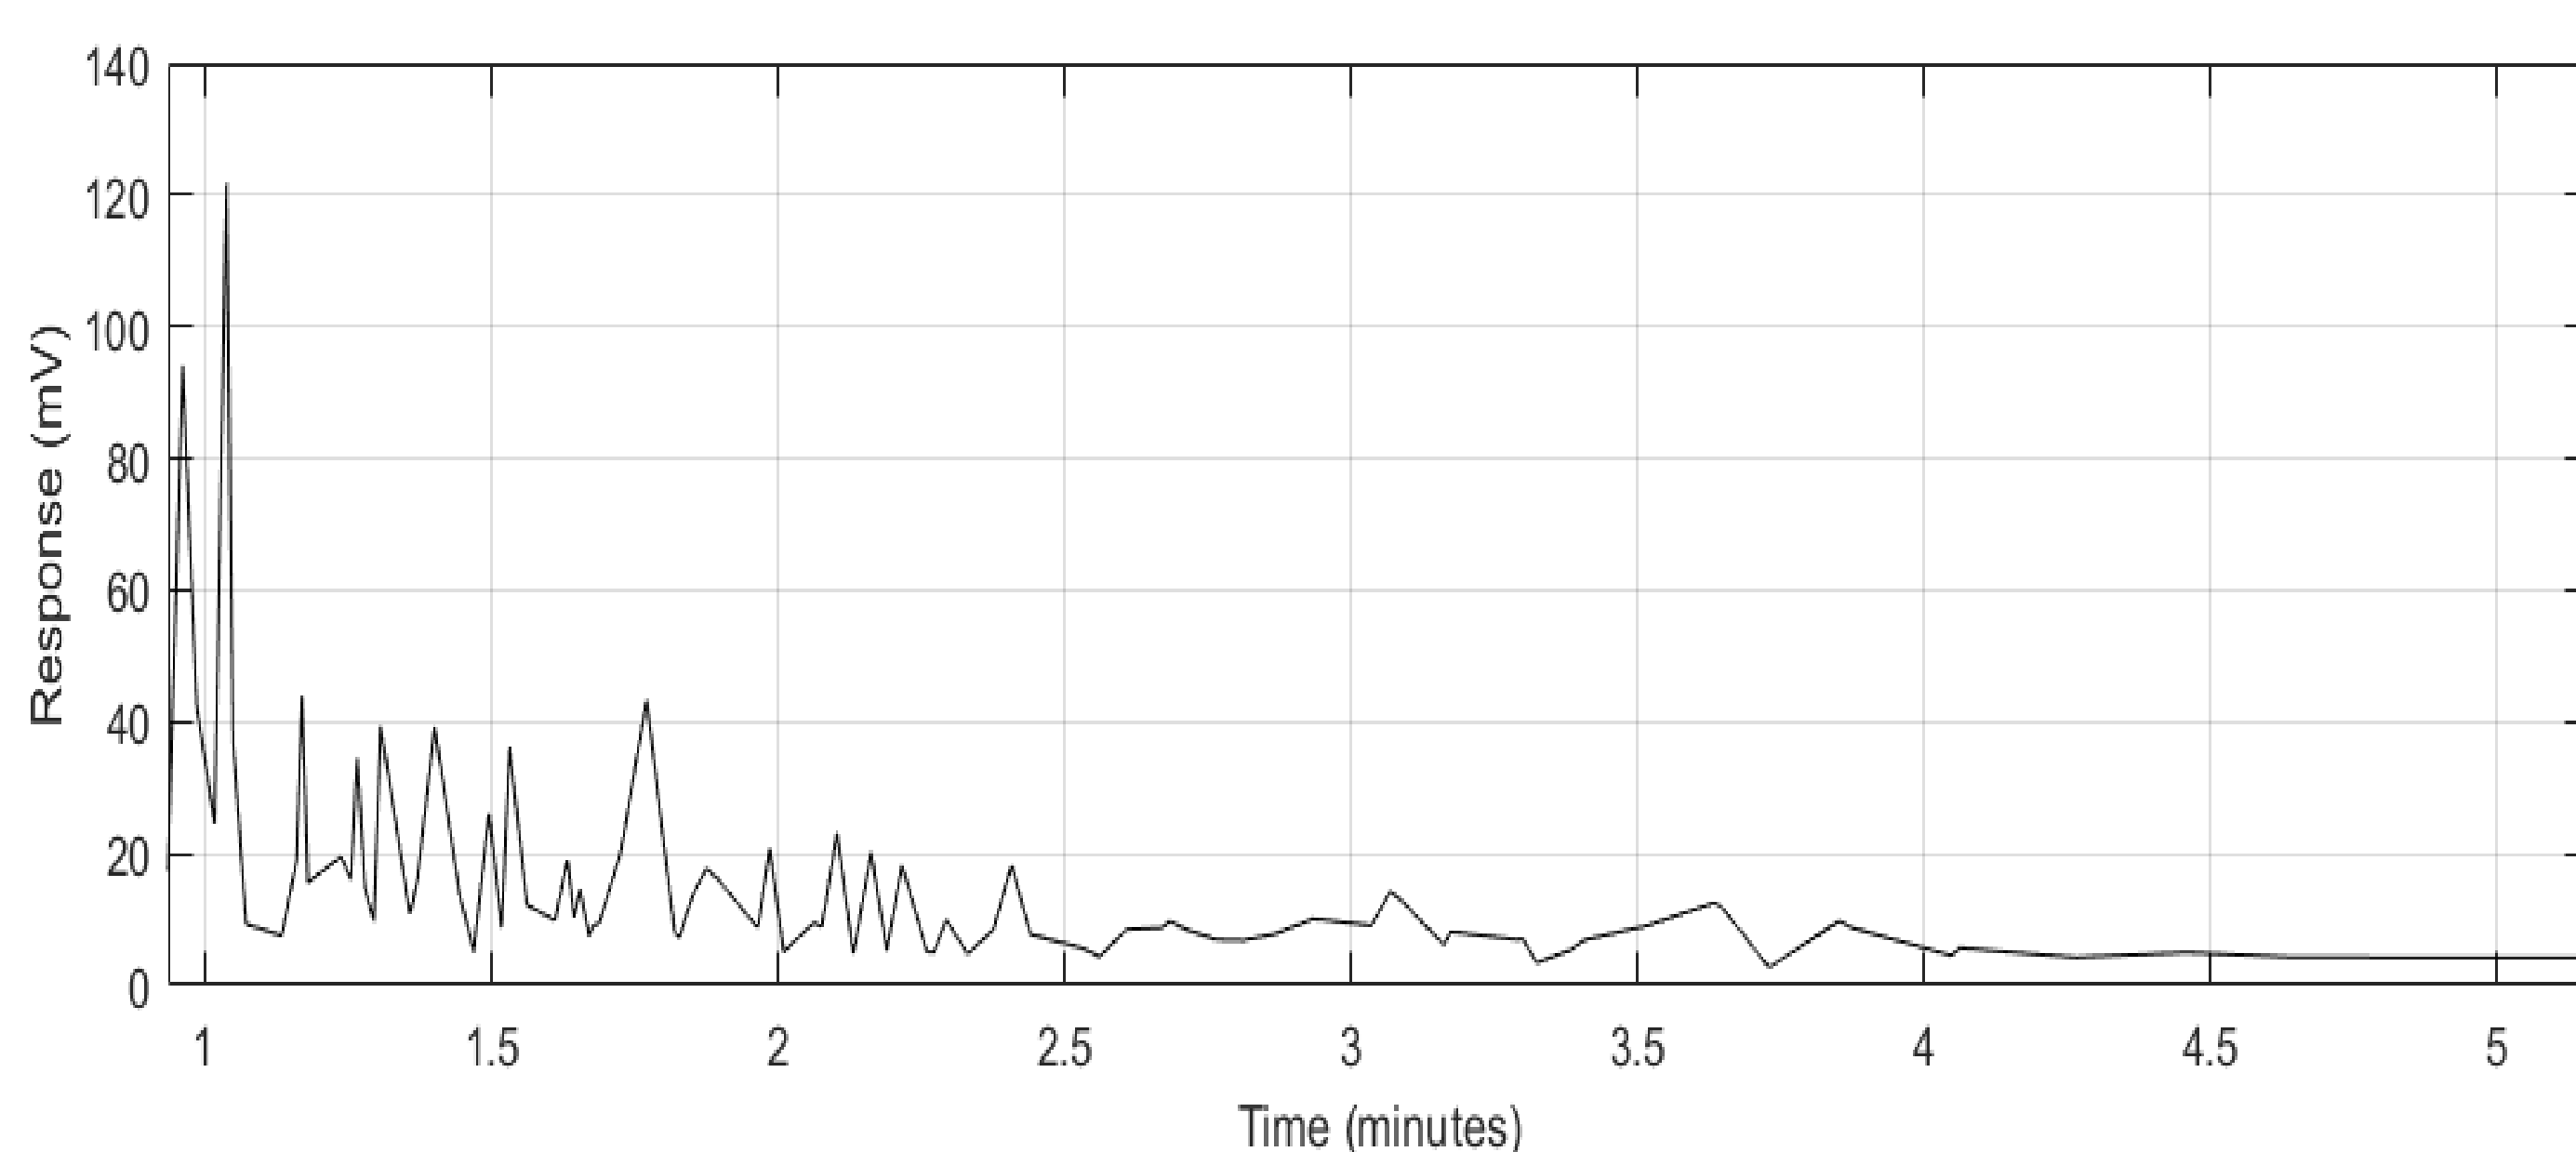


Example of GC-FID analysis of an oil sample.

Preliminary results and discussion

Preliminary results have been produced using five types of aqueous phases (distilled water, NaCl (6 g/L), NaCl (15 g/L), NaCl (25 g/L) and sea water) and one type of stock tank oil (Frederiksen A/S Crude Oil), at two different temperatures with five minutes of settling time.

Table 1: Types of aqueous phases prepared for the preliminary experiments

Water type	Concentration (g/L)	Ionic strength (M)
Distilled water	-	0
NaCl	6	0.1
NaCl	15	0.3
NaCl	25	0.4
Sea water	35	0.8

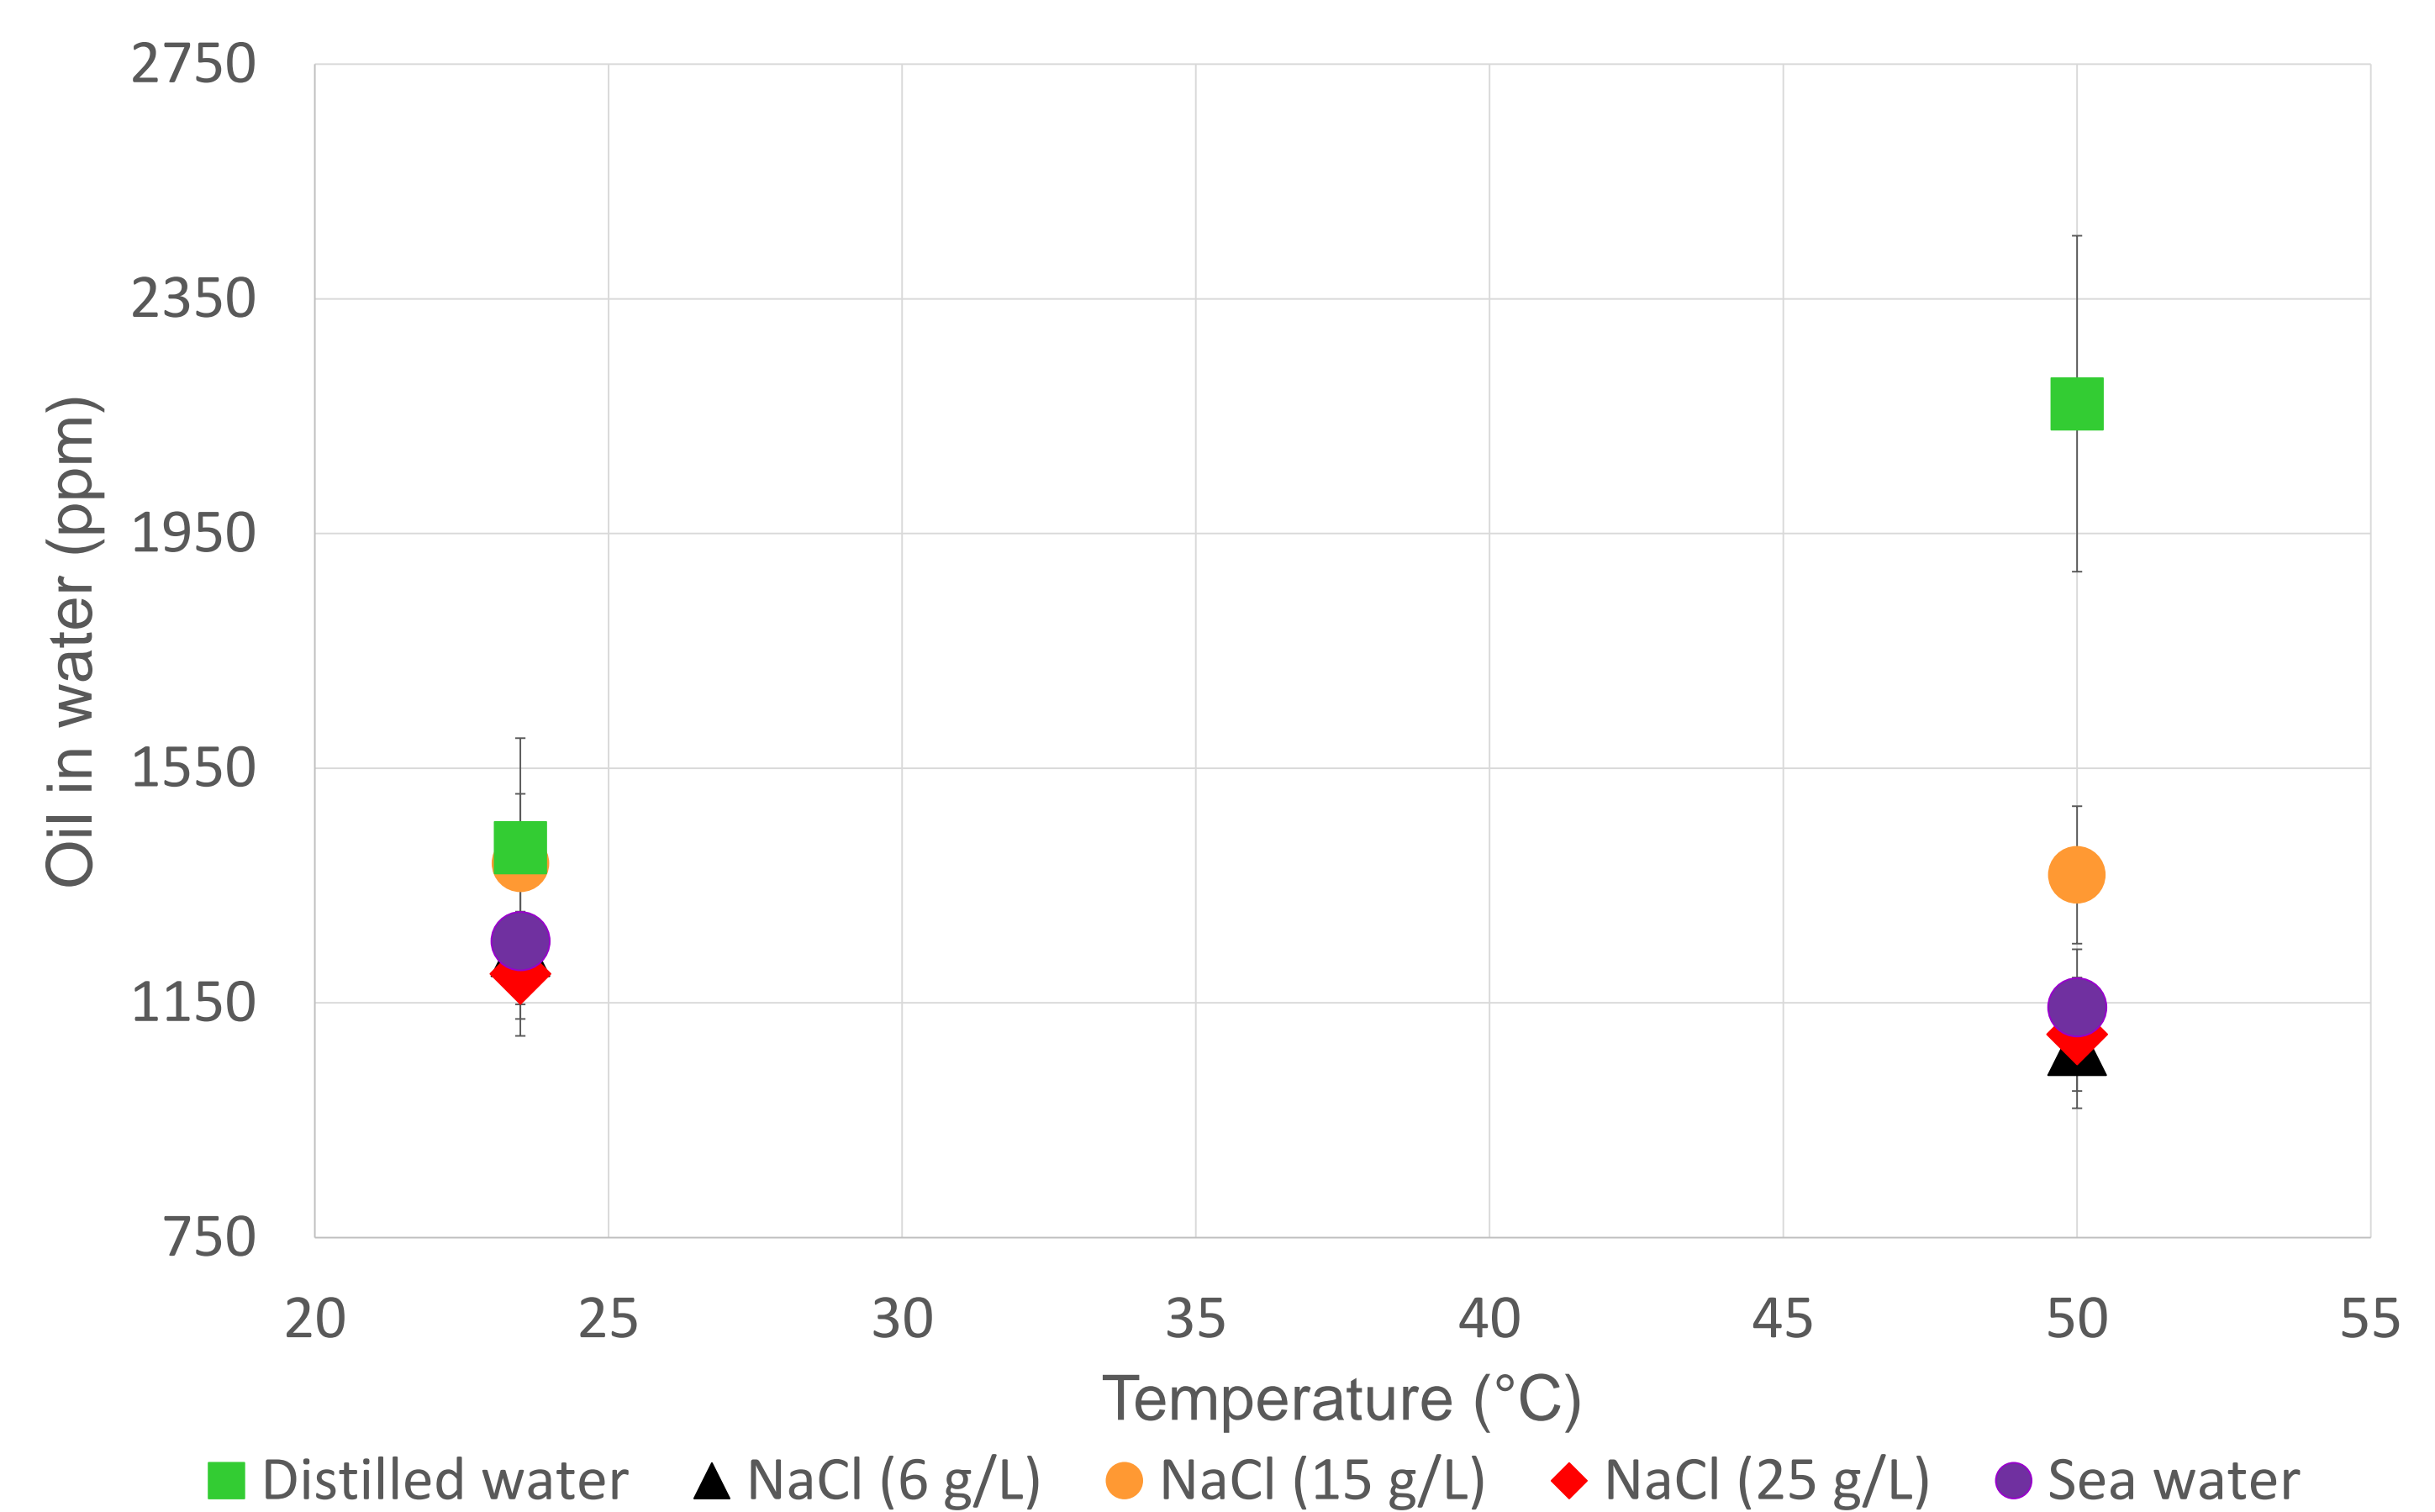


oil-in-water concentration vs. gravity settling temperature for 5 minutes of settling time. Data refer to five different types of aqueous phases. Each marker refer to the average of at least four repetitions.


- The rate of separation decreases with temperature with distilled water. The opposite occurs in the presence of electrolytes.
- The variation with temperature of the rate of separation is more significant for distilled water.

Future work

- Two different film forming corrosion inhibitors (FFCI) will be investigated.
- One demulsifier will be used in combination with the corrosion inhibitors.
- The effect of these, and different types of aqueous phases, will be studied for various settling times.

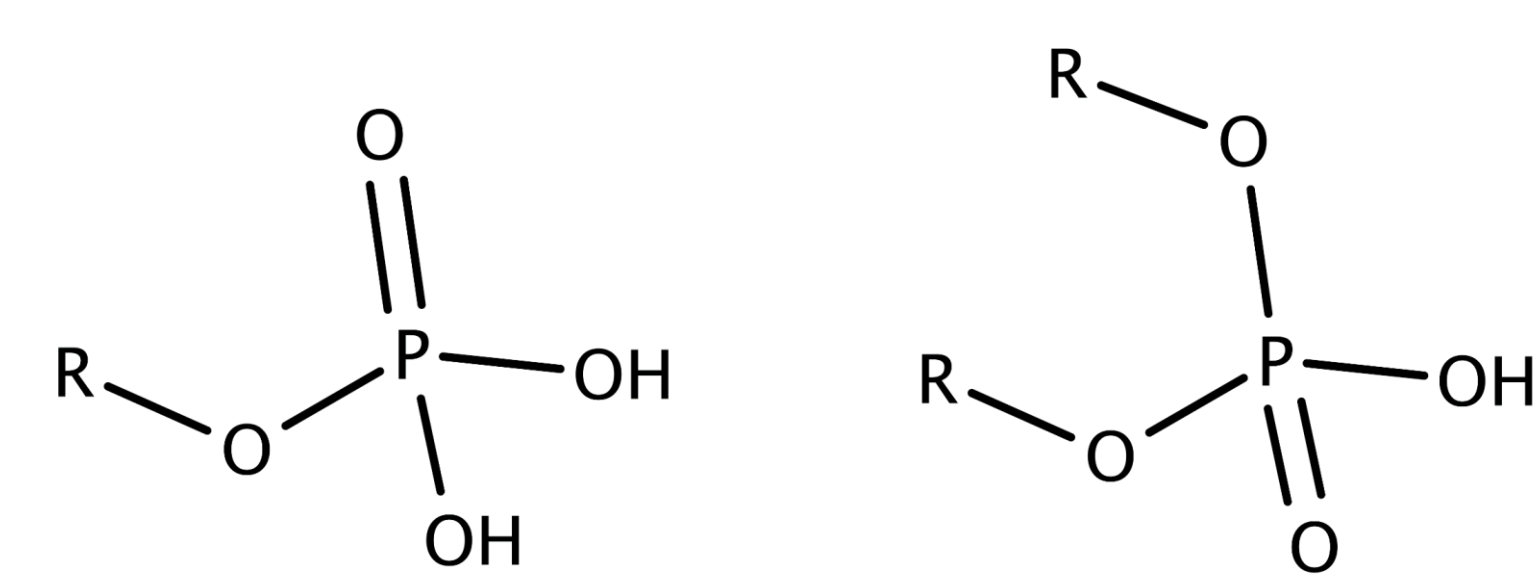

Structures of typical phosphate ester FFCI's

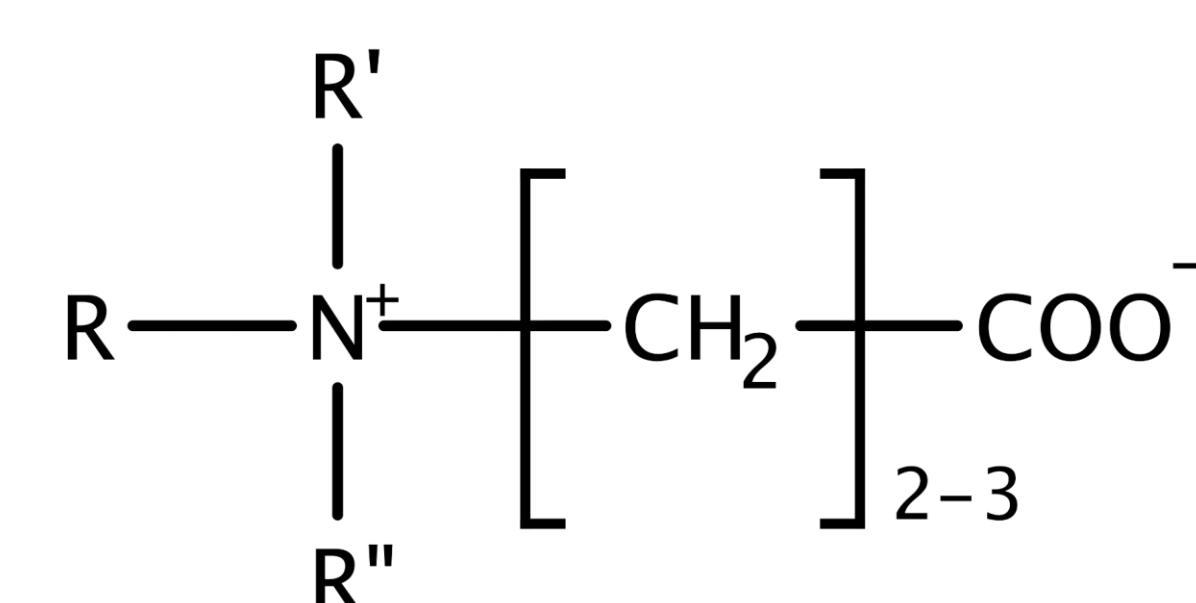

Zwitterionic betaine FFCI

Acknowledgements

The project is financially supported by the Danish Hydrocarbon Research and Technology Centre.